


RACCORDI FILETTATI THREADED FITTINGS

CURVA A 90° CON CODOLO E DADO PN25 90° THREADED ELBOW WITH UNION PN25




ARTICOLO	MISURE mm
CODE	SIZES mm
CCD 2020	20 x 1/2"
CCD 2025	20 x 3/4"
CCD 2520	25 x 1/2"
CCD 2525	25 x 3/4"
CCD 2532	25 x 1"
CCD 3232	32 x 1"
CCD 3240	32 x 1 1/4"

SPECIFICHE TECNICHE TECHNICAL SPECIFICATIONS

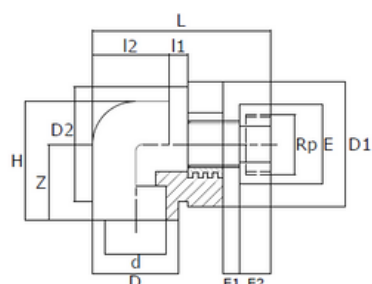

CODE	d	Rp	D	D1	D2	I1	I2	L	E	E1	E2	H	Z	weight (g)
CCD 2020	20	1/2"	30	40	36	8	27	69	28	7	13	43	27	124
CCD 2025	20	3/4"	30	40	36	8	27	65	33	4	13	43	27	128
CCD 2532	25	1"	36	47	43	8	32	69	41	7	16	50	31	192
CCD 3240	32	1 1/4"	44	54	50	10	42	88	49	10	18	60	38	318

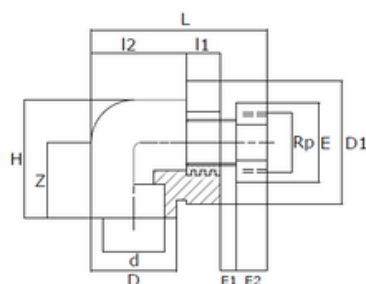

CODE	d	Rp	D	D1	I1	I2	L	E	E1	E2	H	Z	weight (g)
CCD 2520	25	1/2"	36	40	14	38	72	28	7	13	50	33	130
CCD 2525	25	3/4"	36	40	14	38	66	33	4	13	50	33	134
CCD 3232	32	1"	44	48	15	54	84	41	7	16	60	38	212

Tutti i raccordi TORO 25 sono compatibili con tutte le serie di tubi TORO 25.
All TORO 25 pipe fittings are compatible with all TORO 25 pipe series.

STANDARD:

- ISO 15874
- ISO 15494
- DIN 8077-78