


RIDUZIONE FILETTATA FEMMINA PN25


THREADED COUPLING PN25 - FEMALE

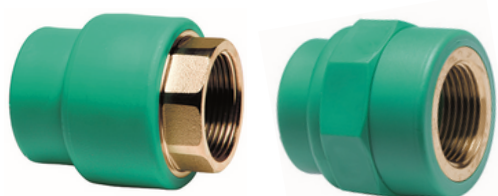


ARTICOLO	MISURE mm
CODE	SIZES mm
RFF 2020	20 x 1/2"
RFF 2025	20 x 3/4"
RFF 2520	25 x 1/2"
RFF 2525	25 x 3/4"
RFF 3225	32 x 3/4"
RFF 3232	32 x 1"
RFF 4040	40 x 1"1/4"
RFF 5050	50 x 1"1/2"
RFF 6363	63 x 2"
RFF 7575	75 x 2"1/2"
RFF 9090	90 x 3"
RFF 110110	110 x 4"

SPECIFICHE TECNICHE

TECHNICAL SPECIFICATIONS

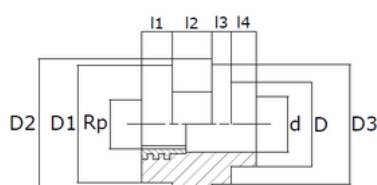


CODE	d	Rp	D	D ₁	D ₂	D ₃	I ₁	I ₂	I ₃	I ₄	weight (g)
RFF 2020	20	1/2"	30	36	40	35	11	14	7	10	60
RFF 2025	20	3/4"	30	42	47	43	11	14	7	9	76
RFF 2520	25	1/2"	35	40	47	45	15	13	5	11	72
RFF 2525	25	3/4"	35	40	48	44	16	12	5	11	76

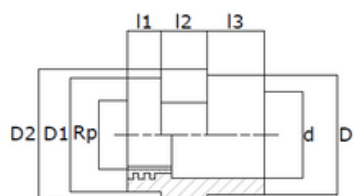

CODE	d	Rp	D	D ₁	D ₂	I ₁	I ₂	I ₃	weight (g)
RFF 3225	32	3/4"	44	42	48	12	17	21	82
RFF 3232	32	1"	45	50	55	13	14	17	124

RACCORDI FILETTATI THREADED FITTINGS

SPECIFICHE TECNICHE TECHNICAL SPECIFICATIONS



CODE	d	Rp	D	D ₁	D ₂	l	l ₁	L	weight (g)
RFF 4040	40	1"1/4"	55	69	52	38	26	78	396
RFF 5050	50	1"1/2"	68	77	58	39	27	84	494
RFF 6363	63	2"	85	93	70	42	30	91	634
RFF 7575	75	2"1/2"	100	118	94	36	32	90	1144
RFF 9090	90	3"	115	135	100	46	35	100	1500
RFF110110	110	4"	140	155	123	44	40	115	1942

Tutti i raccordi TORO 25 sono compatibili con tutte le serie di tubi TORO 25.
All TORO 25 pipe fittings are compatible with all TORO 25 pipe series.

NSF 61 approved

STANDARD:

- ISO 15874
- ISO 15494
- DIN 8077-78